

SLO-PITCH PREMIUM BASE SET-UP GUIDE




STEP 1

Loosen the straps on the bottom of the base slightly, in order to provide slack for the steel peg. You do not need to un-do the strap in order to attach the steel peg to the base.



STEP 2

Using the small gap on the head of the steel peg, slide the strap inside the head of the steel peg, and twist the peg so that the head is oriented on the outside of the base, easily accessible for the mallet.

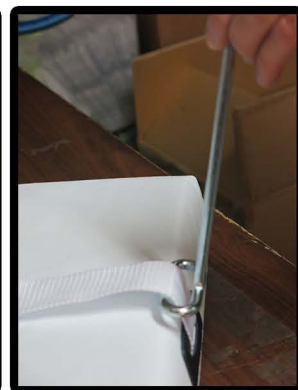

STEP 3

Repeat until each base has one steel peg attached at the end of each strap, on the outside of the base. This includes 2nd base, 3rd base, and the 1st base double combo.


STEP 4

Your bases are now ready for installation – once at the ball diamond, measure out your distances to each bag using the online set-up diagram. (See “Field Set-Up Instructions” on Rules Tab)



STEP 5

Using the mallet, pound each steel peg into the shale, ensuring that they do not protrude and cause a hazard to base runners. If you hit rock or a hard spot in the shale, try moving the base or peg slightly instead of bending your peg by pounding it into the rocky terrain.

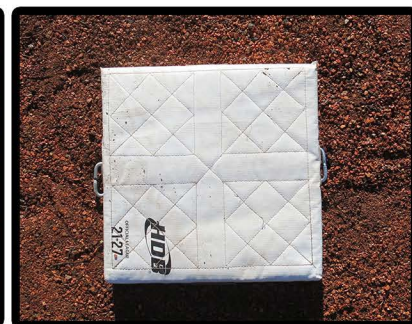

STEP 6

After pounding in each of the two pegs per base (six total) your bases are now set-up!



STEP 7

When the game is over, use the hook on the end of the mallet to retrieve your bases, rather than trying to pull the pegs out with your hand!

EDMONTON SPORT & SOCIAL CLUB

The ESSC has extra mallets for sale, please contact us if you need a new or replacement mallet.